


Exhibit

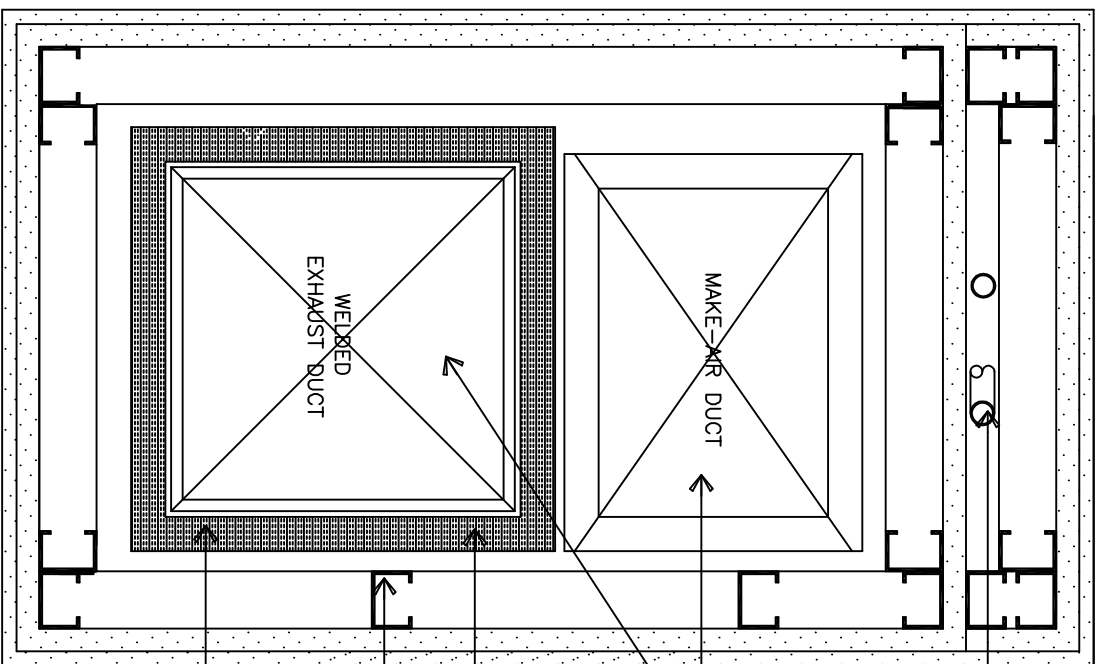

ELECTRIC CONDUIT AND UTILITIES AS REQUIRED

5/8" TYPE "X" GYPSUM BOARD

WELDED EXHAUST DUCT AND MAKE-UP AIR DUCT AS REQUIRED

FLOOR SLAB GROUTED AROUND DUCTS TO PROVIDE FIRE STOP WITHIN CHASE

NEW DUCT SHAFT CONSISTING OF SHEETROCK BRAND CAVITY SHAFT WALL SYSTEM INSERTED BETWEEN 2 1/2" FLOOR AND CEILING "J" RUNNERS WITH 2 1/2" PROPRIETARY VENTED C-H STUDS BETWEEN PANELS.

(1) LAYER UNIFRAX "FYREWRAPE" ELITE 1.5 DUCT INSULATION INSTALLED PER MANUFACTURER SPECIFICATIONS AROUND WELDED EXHAUST DUCT BY L.L.C.C.

PLAN VIEW: DUCT SHAFT DETAIL

SCALE: 1 1/2"=1'-0"